


PowerPost Cable Connectors

Insulated single stainless steel stud terminates multiple large conductors

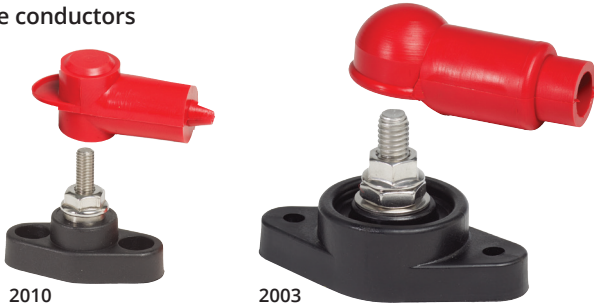

- One-piece serrated flange nuts ensure correct and secure connections

Specifications

Continuous Rating Not rated—amperage flows between terminals stacked on post and is determined by wire and terminals used.


Voltage Max. Operating 48V DC

Mounting Holes Accepts #8 Screws (2010, 2011)
Accepts 1/4" Screws (2001, 2002, 2003)

Regulatory

CE Certified

PN	Terminal Stud
2010	#10-32 x 5/8"
2011	1/4"-20 x 3/4"
2001	1/4"-20 x 1-1/16"
2002	5/16"-18 x 7/8"
2003	3/8"-16 x 7/8"

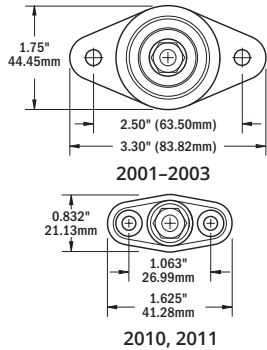

Dual PowerPost Cable Connectors

Provides a termination point for extending the length of outboard harnesses or other conductors

- Designed for connecting high amperage conductors
- 2018 is also designed for outboard engine installation when factory cables need to be extended
- One-piece serrated flange nuts ensure correct and secure connections

Specifications


Continuous Rating Not rated—amperage flows between terminals stacked on post and is determined by wire and terminals used.

Voltage Max. Operating 48V DC

Mounting Holes Accepts #10 (M5) Screws



PN	Terminal Studs	Insulating Cover	Stud Height A in (mm)	Stud Height B in (mm)
2016	2 x 5/16"-18	Yes	1.50 (38.1)	1.50 (38.1)
2016100	2 x 5/16"-18	--	1.50 (38.1)	1.50 (38.1)
2017	2 x 3/8"-16	Yes	1.63 (41.3)	1.63 (41.3)
2017100	2 x 3/8"-16	--	1.63 (41.3)	1.63 (41.3)
2018	1 x 5/16"-18, 1 x 3/8"-16	Yes	1.50 (38.1)	1.63 (41.3)
2018100	1 x 5/16"-18, 1 x 3/8"-16	--	1.50 (38.1)	1.63 (41.3)

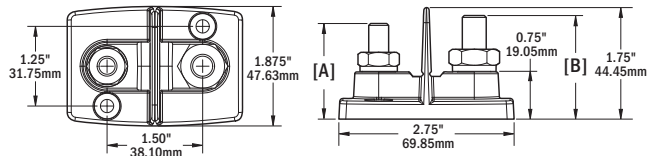

PowerPost Plus Cable Connectors

Enables connection of multiple smaller wires in spaces where a traditional bus bar may not fit



- 150 Amp bus allows small wire connections at high amperage cable connections
- One-piece serrated flange nut ensures correct and secure connections

Specifications

Continuous Rating 150A DC

Voltage Max. Operating 48V DC

Mounting Holes Accepts 1/4" Screws

Bus Material Tin-Plated Copper

Regulatory

CE Certified

PN	Terminal Stud	Terminal Screws
2101	1/4"-20 x 1"	8 x #8-32
2102	5/16"-18 x 3/4"	8 x #8-32
2103	3/8"-16 x 3/4"	8 x #8-32

Terminal Feed Through Connectors

Eliminates chafe and provides strain relief when passing high current through bulkheads

- Protects large cables that are subject to chafing when passed through holes
- The large terminals have a mounting face that can be gasketed or bedded to provide a water-tight installation
- One-piece serrated flange nut ensures correct and secure connections

Specifications

Stud Material Tin-Plated Copper Alloy

Mounting Holes Accepts #10 (M5) Screws

Regulatory

Rated IP66—protected against powerful water jets

PN	Terminal Stud	Amps	Volts	Color
2201	5/16"-18	250A	48V	Black
2202	5/16"-18	250A	48V	Red
2203	3/8"-16	250A	48V	Black
2204	3/8"-16	250A	48V	Red

